



Product  
Catalogue  
2026



[www.ritchie-d.co.uk](http://www.ritchie-d.co.uk)

David Ritchie (Implements) Ltd  
 Manufacturers of Farm Equipment.  
 Specialists in Bale Handling, Grassland and  
 Livestock Equipment.

- » Carseview Road, Forfar, Scotland, DD8 3BT
- » Neachells Lane, Willenhall, West Midlands, WV13 3RP
- » Tel: 01307 462271 | Fax: 01307 464081
- » Email: [salessupport@ritchie-uk.com](mailto:salessupport@ritchie-uk.com)
- » Web: [www.ritchie-d.co.uk](http://www.ritchie-d.co.uk)

# Over 155 years of manufacturing excellence



## Hot Dip Galvanising

Ritchie galvanised products incorporate a highly protective zinc-iron alloy coating to protect and preserve all exposed surfaces from the corrosive effects of animal and silage effluent.

Components pass through acid cleaning baths and a pre-dip fluxing system prior to galvanising to extend the life of Ritchie products.

Hot dip galvanising to standard BS EN ISO: 1461:2009.

## Prices

See our website for the most up to date pricing.  
 Carriage paid to British mainland merchant premises.

Any standard items returned will be subject to a handling charge of 15%.

Errors and omissions excepted.

Shortages and/or damage must be reported in writing or emailed within 48 hours.

## Machinery

Bale Accumulators .....	06
Bale Handling.....	09
Roots and Grain Feeders .....	16
Grassland Aerators.....	19
Grassland Harrows.....	20
Yard Scrapers .....	24
Transport Boxes .....	27

## Cattle

Beef Monitor.....	28
Cattle Drafting Gate .....	32
Stock Cube™ .....	33
Mobile Cattle Crate.....	34
Cattle Crates .....	36
Neck Yokes.....	43
Cattle Weighing .....	47
Highland Cattle Crate .....	48
Cattle Handling .....	50
Calf Handling.....	58
Cattle Feeding .....	60
HDPE Troughs.....	65
Cattle Troughs .....	66

## Water Troughs

Water Troughs .....	67
---------------------	----

## Sheep

Combi Clamp .....	68
Lamb Weighing.....	74
Sheep Systems .....	78
Sheep Equipment .....	84
Sheep Feeding.....	94
Lamb Equipment.....	103

## Gates

Gates.....	105
------------	-----

## Depots

Contacts .....	114
----------------	-----

Full terms and conditions are available on our website.

Product specifications are subject to change without notice.

Ritchie was established over 155 years ago as a blacksmithing service to the local community of Gateside in the County of Angus, Scotland.

As farming advanced during the late 19th and early 20th Century, traditional blacksmithing skills were replaced with the manufacturing of a small range of innovative implements designed to improve efficiency and reduce labour inputs as horsepower gave way to steam and tractor power. This business expansion necessitated relocating from the country into the town of Forfar where Ritchie continued to develop and manufacture products for both the livestock and arable industries.



Willenhall



Forfar

Today Ritchie occupy a 14-acre site on the outskirts of Forfar, which houses their manufacturing and business centre, and a manufacturing depot situated in the Midlands. Investment in the latest galvanising, CNC, robotic and computer technologies support a skilled and motivated workforce with products supplying the UK and world markets.



David Ritchie  
1851 - 1938



David Ritchie  
1878 - 1946



Robert Ritchie  
1908 - 1969



George Scott Ritchie  
1919 - 1996

Over 155 years of  
manufacturing excellence



Ground Friction Bale Accumulators

1421G  
8 Bale Automatic



Main Features

- » Uncomplicated design and robust construction mean trouble-free operation
- » Suitable for use with most modern balers including Lely Welger
- » The Automatic accumulator releases the bales on completion of the pack
- » Drawbar kit is supplied

Spec.	Length	Width	Height	Weight	Wheel Size
1421G	4800mm	2500mm	850mm	336kg	4.80/4.00 - 8 6ply



Fully Galvanised Frame

1422G  
8 Bale Windrower



Main Features

- » The same as the 8 Bale Automatic model
- » The Windrower allows the operator to hold a pack of bales whilst the next is being formed. The operator can then release when convenient, to allow more efficient collection of bales from the field
- » Ideal for hay and straw

Optional Hydraulic Release Kit: 1422-600

Spec.	Length	Width	Height	Weight	Wheel Size
1422G working	6300mm	2750mm	850mm	2750kg	4.80/4.00 - 8 6ply
1422G transport	4800mm	2750mm	1220mm	2750kg	4.80/4.00 - 8 6ply



Fully Galvanised Frame



### Super Bale Accumulators - High Capacity

#### 1426G 8 Bale Automatic 1427G 8 Bale Windrower



##### Main Features

- » The Super Bale Accumulator is ideal for the contractor or larger farm requiring maximum output
- » The hydraulic floor allows continuous, non-stop operation with high capacity balers in dense crops
- » The design eliminates any soil contamination of the bale and stone damage to the twine
- » The automatic accumulator releases on completion of the pack, ideal for haylage, hay and straw
- » The Windrower Extension Kit allows the operator to hold a pack of bales whilst the next is being formed. The operator can then release when convenient to allow more efficient collection of bales from the field, ideal for hay and straw
- » Hoses and drawbar kit supplied

Optional Hydraulic Release Kit: 1422-600

Extension Kit: 1427G-EXT

Make the 1426G into a 1427G with our Extension Kit

Spec.	Length	Width	Height	Weight	Wheel Size
1426G	5570mm	2800mm	1100mm	820kg	4.80/4.00 - 8 ply
1427G	8170mm	2800mm	1100mm	930kg	4.80/4.00 - 8 ply



Fully Galvanised Frame

#### 1416G Bale Grab with Opposing Tines



##### Main Features

- » Forged steel tines, tapered for ease of penetration
- » Opposing tines to provide a secure hold of the bales
- » Sweep rail can be fitted to the left or right side
- » Hoses and loader brackets not supplied

Optional bolt on brackets available

Spec.	Length	Width	Height	Weight
1416G	2060mm	1800mm	730mm	235kg





## 1484 Bale Inverter



### Main Features

- » The Bale Inverter handles round silage bales up to 1.5m diameter
- » The left or right hand arm can be locked for stacking in confined areas
- » The Inverter comes complete with a suitable back plate for welding on the appropriate quick-hitch brackets
- » Hoses and loader brackets not supplied

Spec.	Length	Width	Height	Weight	Max Bale Weight
1484	1200mm	1400mm	660mm	175kg	750kg



## 1487 Wrapped Bale Handler



### Main Features

- » Handles maximum sized round and square bales
- » Made to handle round or square bales from both directions
- » Unique front arm pivot arrangement allows easy stacking of bales
- » Powered by a double acting cylinder for positive control
- » Hoses and loader brackets not supplied

### Optional bolt on brackets available

Spec.	Length	Width	Height	Weight	Max Bale Weight
1487	2060mm	1800mm	730mm	235kg	750kg



## 1412 Multi Bale Handler



### Main Features

- » Handles 2 round straw bales up to 1.8m diameter
- » Handles 3 midi and 2 large Hesston straw square bales
- » Fitted with 10 curved high tensile steel tines
- » Leaves a neat puncture mark on net wrap
- » High, see-through back frame for excellent operator visibility
- » Powered by twin ram arrangement
- » Excludes brackets and hoses

### Optional bolt on brackets available

Length	Width	Height	Weight	Max. Load Weight
510mm	1660mm	1540mm	285kg (U.L.)	1200kg



## 1413 Super Multi Bale Handler



### Main Features

- » Handles 3 round straw bales up to 1.8m diameter
- » Handles 4 midi and 2 large Hesston straw square bales
- » Fitted with 14 curved high tensile steel tines
- » Leaves a neat puncture mark on net wrap
- » High, see-through back frame for excellent operator visibility
- » Powered by twin ram arrangement
- » Excludes brackets and hoses

### Optional bolt on brackets available

Length	Width	Height	Weight	Max. Load Weight
510mm	1660mm	2270mm	330kg (U.L.)	1200kg





## 1440 Bale Claw



### Main Features

- » Collapsible tines for compact storage and safer transport
- » Hydraulic folding/unfolding operable from inside the tractor cab
- » Rear-entry, curved upper tines designed for secure grip and smooth loading
- » Carries up to 3 large Hesston bales at a time
- » Built for strength, stability, and performance in demanding conditions

Optional bolt on brackets available

Length	Width	Height	Max. Load Weight
2750mm	1710mm	1000mm	2000kg



## Material Handler / Front Loader Brackets



### Main Features

- » Brackets are suitable for bale handler models 1412, 1413, 1416 and 1487. Roots & Grain Feeder models 1883G
- » All brackets are supplied complete with bolts and fitting instructions



1412-500 Eurohooks

1412-600  
John Deere / Matbro  
'Cone & Pin' Type



1412-700 JCB Q Fit

1412-800  
Manitou Telescopic



1412-900  
Merlo Telescopic



## 1883G Roots and Grain Feeder for 3 point linkage



### Main Features

- » Capacity of 1.12m<sup>3</sup>
- » Hydraulic drive suitable for 3 point linkage
- » Hydraulic top link included for tractor mounted self-loading (1883G only)
- » Manual stone trap fitted to eject stones when feeding root crop
- » Full length trash trap under the auger helps deliver cleaner feed
- » Agitator wheels fitted to prevent grain bridging
- » Suitable for any root / grain crop
- » Stationary cutter head for added safety
- » Fitted with pressure relief valve
- » Externally mounted motor is protected by the bucket frame

Optional 1883G-500 Roots & Grain Feeder Hydraulic Shutter available

Spec.	Length	Width	Height	Weight	Bucket Size
1883G	1720mm	2120mm	1000mm	480kg	w 1830mm x d 1086mm



## 1883GT Roots and Grain Feeder front loader or telescopic forklift mounting



### Main Features

- » Capacity of 1.12m<sup>3</sup>
- » Hydraulic drive suitable for loader mounting or telescopic forklift mounting
- » Manual stone trap fitted to eject stones when feeding root crop
- » Full length trash trap under the auger helps deliver cleaner feed
- » Agitator wheels fitted to prevent grain bridging
- » Suitable for any root / grain crop
- » Stationary cutter head for added safety
- » Fitted with pressure relief valve
- » Externally mounted motor is protected by the bucket frame

Brackets sold separately see page 15

Spec.	Length	Width	Height	Weight	Bucket Size
1883GT	1720mm	2120mm	1000mm	530kg	w 1830mm x d 1086mm



Shown with optional 1883G-500 Roots & Grain Feeder Hydraulic Shutter



## 1885G



### Main Features

- » Capacity of 1.67m<sup>3</sup>
- » 65% larger than the 1883G and 1883GT models
- » Suitable for front or telescopic forklift mounting
- » Hydraulic drive suitable for front, rear or telescopic forklift mounting
- » Manual stone trap fitted to eject stones when feeding root crop
- » Agitator wheels fitted to prevent grain bridging
- » Suitable for any root / grain crop
- » Stationary cutter head for added safety
- » Fitted with pressure relief valve
- » Externally mounted motor is protected by the bucket frame

Optional 1883G-500 Roots & Grain Feeder Hydraulic Shutter available. Brackets sold separately see page 15

Spec.	Length	Width	Height	Weight	Bucket Size
1885G	2600mm	2120mm	1400mm	750kg	w 2217mm x d 1227mm



## 860G 2.5m wide 863G 3.0m wide



### Main Benefits

- » Relieves compaction
- » Better drainage of water into soil structure
- » Improves grass production

### Main Features

- » Category 2 three point linkage
- » Adjustable solid shaft which incorporates double flange fitting for the blades
- » Boron steel blades, 12mm thick x 260mm long
- » Low maintenance / low horsepower required
- » Incorporated weight tray fitted
- » Self aligning bearings fitted with shaft locks

Specification	Length	Width	Height	Weight	Blades
860G	790mm	2450mm	1250mm	400kg	42
863G	790mm	3130mm	1250mm	475kg	54





## 820Quad 1.5m wide



### Main Features

- » Designed to be pulled by ATV or 4WD pickup
- » Front levelling bar frame to level mole hills and disperse manure
- » Cast harrow tines to break up clods
- » Rubber mounted pivot points to allow flexible levelling over uneven ground
- » Lift and lower electrohydraulic function operated remotely and powered by ATV or optionally customer-fitted 12v mounted battery
- » Wide tyres for improved stability on soft ground
- » Locking pins to ensure harrow frame is maintained in raised position for transport

Specification	Length	Width	Height	Weight
820 Quad	2938mm	1850mm	713mm	220kg



## 822G 2.2m wide



### Main Benefits

- » Fully mounted grass harrows with an incorporated levelling bar frame to level mole hills and disperse manure
- » Fitted with a reversible cast harrow mat with teeth on one side and a levelling surface on the other. 4 rows of cast replaceable tines
- » Mounted harrows with floating top-link to cope with uneven ground
- » Hot dipped galvanised finish
- » Category 1 linkage

### Optional Replacement Harrow Mat 822G-500P

Specification	Length	Width	Height	Weight
822G	1830mm	2200mm	730mm	200kg



## 824G 4.0m Manual Folding 824GH 4.0m Hydraulic Folding



### Main Features

- » 4 rows of 'Tri' spike tines
- » Fully mounted harrows with an incorporated levelling bar frame manufactured from heavy steel angle section
- » Fitted with a 4 row reversible cast harrow mat which offers short teeth on one side and long teeth on the other, the mat is replaceable
- » Folds for road transport
- » Mounted harrows with floating top-link to cope with uneven ground
- » Hot dipped galvanised finish

Optional Hydraulic Fold Kit 824G-A50 (for 824G)  
Replacement Harrow Mat 824G-500P

Specification	Length	Width	Height	Weight
824G	1800mm	4000mm	850mm	354kg



## 826G 6.0m Hydraulic Folding



### Main Benefits

- » Fully mounted grass harrows with an incorporated levelling bar frame to level mole hills and disperse manure
- » Fitted with a reversible cast harrow mat which offers teeth on one side and levelling on the other side. 4 rows of cast replaceable tines
- » Mounted harrow with floating headstock to cope with uneven ground.
- » Folds hydraulically for road transport
- » Hot dipped galvanised finish

Optional Replacement Harrow Mat 826G-500P

Specification	Length	Width	Height	Weight
826G working	1840mm	6000mm	945mm	670kg
826G transport	1840mm	2800mm	1945mm	670kg



## 1876G Heavy Duty Yard Scraper



### Main Features

- » An adjustable width scraper 1,828mm to 2,440mm
- » Designed for push / pull operation
- » Fitted with a 50mm thick solid rubber blade
- » Positive trip mechanism operated by rope is provided
- » Incorporated is an 'A' frame facility on the headstock

Specification	Length	Width	Height	Weight
1876G	820 - 1050mm	1828 - 2440mm	1000mm	185kg



## 1876G - Euro Scraper



### Main Features

- » Yard Scraper with Eurohooks incorporated

Specification	Length	Width	Height	Weight
1876Euro	820 - 1050mm	1828 - 2440mm	731mm	230kg



## 1876GSS Yard Scraper to suit Skid Steer Unit



### Main Features

- » Easy access to and from Skid Steer unit
- » Incorporated Skid Steer quick attach brackets
- » Adjustable width blade, 1,828mm to 2,440mm
- » Designed for push / pull operation
- » Fitted with a 50mm thick solid rubber blade

Specification	Length	Width	Height	Weight
1876GSS	820 - 1050mm	1828 - 2440mm	731mm	240kg



## 1865G Combi-Scrape



### Main Features

- » Offers fully automatic push-and-pull operation
- » Features independently moving side panels that adapt to uneven surfaces
- » Includes Polyurethane blades as standard
- » Hardened Steel Skids
- » Slurry doors hinge on steel bushes, with grease points
- » Adjustable Oilon pads on hub plate to absorb wear and maintain side panel alignment
- » Rotatable side panels carrying two spare skids for non-stop operation when skids wear out
- » 0.625 m<sup>3</sup> fill capacity

Specification	Length	Width	Height	Weight
1865G	1282mm	2028mm	1191mm	445kg



## Transport Box



### Main Features

- » Trip catch from the cab to tip box
- » Cat. 1 and 2 linkage
- » Removable tail door
- » Leading edge for scraping
- » Front linkage compatible

Specification	Length	Width	Height	Weight
1960SR	1207mm	858mm	590mm	168kg
1960MR	1512mm	858mm	590mm	188kg
1960LR	1900mm	858mm	590mm	209kg





## BM3000 Beef Monitor Unit BM3100 Solar Kit

A small monthly subscription to save time and money with reduced labour and higher accuracy of finishing cattle live weight gains.

By taking several readings a day for each beast and providing you with an average weight at any point during the day or night puts you in greater control. This enables you to ensure optimal weight for your cattle, while at the same time reducing labour and waste bedding and feed from keeping cattle too long.

The RITCHIE Beef Monitor also provides you with added insight into your herd by identifying issues you may not spot straight away such as frozen pipes or feed inefficiency.

Easily set-up and operated, the data is stored in the cloud for viewing on any computer, tablet or smart phone enabling monitoring at your fingertips.

Specification	Length	Width	Height	Weight
BM3000	2808mm	1000mm	1240mm	450kg



Optional Solar Kit - BM3100



## 319G 3 Way Cattle Drafting Gate



### Features

- » Powered from a 12V battery
- » Can be set up for automatic or push button drafting
- » Can be used for either 2 or 3 way drafting
- » Can be supplied with EID Panel Reader for attaching to handling crate
- » Compatible with a JR/ID/XR5000 for drafting by weight, sex or EID number
- » Hot dipped galvanised finish

Specification	Length	Width*	Height	Weight
319G	2430mm	880 - 1250mm	2020mm	190kg

\*narrowest to widest point



## 320GLR Stock Cube™



### Features

- » All sheet metal is 'safe edged'
- » Self-locking ratchet style catch with spring-loaded slip bolts on sweep gate
- » 'Creepers' gate eliminates corner traps for stock
- » 'Bolt down' positions for fixed installations
- » Large sized fork lift pockets are incorporated. 150 x 100mm

### Benefits

- » Easily handled by forklift or pallet tines on front loader
- » Can transport up to 20 x 2.5 m (8') cattle hurdles including pins
- » Unique 'creeper' gate eliminates corner trap when operating the main sweep gate
- » Operator is behind the cattle and sweep gate whilst in operation

Specification	Length	Width	Height	Weight
320GLR (Transport)	3350mm	2450mm	2260mm	965kg
320GLR (Working)	3350mm	5500mm	2260mm	965kg



## 310G Mobile Cattle Crate with Automatic Yoke



### Features

- » Easily adjusted automatic head yoke
- » Fully sheeted sides with full access to the side of the animal
- » Access to the rear of the animal from both sides
- » 2 sliding gates are incorporated into the unit
- » Walkway fitted on both sides of the race-way
- » Rubber floor
- » Tack boxes fitted on both sides
- » Hydraulic lift / lower using tractor hydraulics
- » Full road lighting incorporated
- » Optional head scoop can be supplied

### Optional

- » Hurdle Set (12 x 1.5 m hurdles c/w pins) 310G-300
- » Head Scoop 323G
- » Weigh Platform 310G-200, includes weigh bars
- » Hoof Trimming Attachments 339G-880
- » Drop down (revolving) Rump Bar 339G-700

Specification	Length	Width	Height	Weight
310G	7000mm	760mm (Internal)	1720mm (Internal)	2050kg



## 310GMANUAL Mobile Cattle Crate with Manual Yoke



### Features

- » Silent manual head yoke, with no width adjustment required
- » Fully sheeted sides with full access to the side of the animal
- » Access to the rear of the animal from both sides
- » 2 sliding gates are incorporated into the unit
- » Walkway fitted on both sides of the race-way
- » Rubber floor
- » Tack boxes fitted on both sides
- » Hydraulic lift / lower using tractor hydraulics
- » Full road lighting incorporated
- » Optional head scoop can be supplied

### Optional

- » Hurdle Set (12 x 1.5 m hurdles c/w pins) 310G-300
- » Head Scoop 323G
- » Weigh Platform 310G-200, includes weigh bars
- » Hoof Trimming Attachments 312GMANUAL-880
- » Drop down (revolving) Rump Bar 339G-700

Specification	Length	Width	Height	Weight
310GMANUAL	7000mm	760mm (Internal)	1720mm (Internal)	2050kg



## 311G Squeeze Crate with Automatic Yoke



### Features

- » 12 independent, fully sheeted doors - access all the way to the floor allows calves to suckle if necessary
- » Large 860mm internal width for large framed animals including bulls
- » Complete with auto head yoke (left-hand or right-hand operation) to secure the cattle in the crate
- » Parallel squeeze of front 8 doors - reducing from 860mm to 280mm
- » Rubber floor
- » Removable 'Brisket Bar' prevents cattle from kneeling
- » Ability to fit a head scoop for added control of the animal
- » A sliding rear gate allows the vet to gain access to the rear of the animal whilst being protected for the next animal
- » Access doors to rear of crate - open in or out for vet access and safety
- » Quarter turn handles have been added that allow the doors to open with a simple twist
- » Weighing and manual yoke options available



Specification	Length	Width	Height	Weight
311G	3365mm	860 -280mm	2450mm	1000kg

## 311GMANUAL Squeeze Crate with Manual Yoke



### Features

- » 12 independent, fully sheeted doors - access all the way to the floor allows calves to suckle if necessary
- » Large 860mm internal width for large framed animals including bulls
- » Parallel squeeze of front 8 doors - reducing from 860mm to 280mm
- » Rubber floor
- » Silent, manually operated yoke which requires no width adjustment, which can be operated from the entry or exit end of the crate
- » Removable 'Brisket Bar' prevents cattle from kneeling
- » Ability to fit a head scoop for added control of the animal
- » A sliding rear gate allows the vet to gain access to the rear of beast whilst being protected for the next animal
- » Access doors to rear of crate - open in or out for vet access and safety
- » Quarter turn handles have been added that allow the doors to open with a simple twist
- » Weighing and yoke options available

### Optional

- » Head Scoop
- » Hoof Trim Kit
- » Rear Hoof Blocks
- » Hydraulic Kit



Specification	Length	Width	Height	Weight
311GMANUAL	4030mm	860 -280mm	2450mm	1050kg

## 311G-HC Hydraulic Conversion Kit



### Features

- » A kit to convert 311G and 311G MANUAL to a power squeeze
- » Powered by 12v battery and hydraulic pump
- » 12v battery and charger sold separately
- » Allows squeeze mechanism to be operated via remote control
- » Fully portable, without needing separate electric or hydraulic power supply



## 339G Continental Cattle Crate with Automatic Yoke



### Features

- » The crate has a fully automatic yoke with auto reset facility
- » Easily adjustable neck yoke widths, which allows easy handling of calves to bulls
- » Complete access to both sides of the animal with 8 doors
- » Rubber floor
- » Ratchet type rump bar operation
- » Complete with rear gate

### Optional

- » Head Scoop 323G
- » Hoof Trim Kit
- » Pair Rear Hoof Blocks
- » Drop down (revolving) rump bar 339G-700
- » Vertical Restraint Bar 332G-A13
- » Load Brackets

Specification	Length	Width	Height	Weight
339G (Internal)	2030mm	760mm	1720mm	460kg



## 339G MANUAL Strathmore Cattle Crate with Manual Yoke



### Features

- » Manual yoke operated from front or rear of crush
- » Silent, manually operated yoke which requires no width adjustment, which can be operated from the entry and exit side of the crate
- » Complete access to both sides of the animal with 8 doors
- » Rubber floor
- » Ratchet type rump bar operation
- » Complete with rear gate

### Optional

- » Head Scoop 323G
- » Hoof Trim Kit
- » Drop down (revolving) rump bar 339G-700
- » Vertical Restraint Bar 332G-A13
- » Load Brackets

Specification	Length	Width	Height	Weight
339G MANUAL	2860mm	760mm	2070mm	630kg



## 309G Extended Length Continental Cattle Handling Crate



### Features

- » The crate has a fully automatic head yoke with auto reset facility
- » Easily adjustable neck yoke widths, which allows easy handling animals from calves to bulls
- » Complete access to both sides of the animal
- » Rubber floor
- » Ratchet type rump bar operation
- » Complete with sliding rear gate

### Optional

- » Head Scoop 323G
- » Hoof Trim Kit
- » Drop down (revolving) rump bar 339G-700
- » Vertical Restraint Bar 332G-A13
- » Load Brackets

Specification	Length	Width	Height	Weight
309G	2900mm	760mm	1710mm	720kg



### 339G-700 Drop Down (revolving) Rump Bar

(Crate models: 309G, 310G, 339G, 339G MANUAL, 310G MANUAL)



Features

- » Can be set up for either left or right hand operation
- » Friction lock which is silent in operation



### 339G-880 Hoof Trim Kit



Features

- » Designed to minimise stress to the animal and maximise safety to the operator
- » The attachments comprise of: front belly harness, front belly strap, high-level rear leg winch complete with lifting strap, front hoof blocks



Cattle Crate						
310G	310G MANUAL	311G	311G MANUAL	309G	339G	339G MANUAL
Hoof Trim Kit						
339G -880	312G MANUAL-880	311G -880	311G -880	339G -880	339G -880	312G MANUAL-880
Pair Rear Hoof Blocks						
x	x	Comes with 311G -880 kit	Comes with 311G -880 kit	x	339G -900	x

### 353G Auto Head Yoke



Features

- » Can be installed at the end of a race-way or front of an existing crate
- » Operating handle can be located on the left or right side
- » Variable width parallel yoke
- » Supplied with 2 joining pins

Specification	Length	Width	Height	Weight
353G	1124mm	237mm	1859mm	88kg



## 355G Auto Head Yoke Pro



### Features

- » Based on the successful, well-proven Continental Cattle Crate
- » The unit is ideal for installing either in a race or an existing crate
- » The Auto Head Yoke can be operated from either side
- » Variable width neck yoke
- » Automatic reset
- » Neck rope facility

Specification	Length	Width	Height	Weight
355G	1060mm	1127mm	1947mm	145kg



## 357G Manual Head Yoke



### Features

- » Suitable for both young and mature stock
- » Silent operation with no adjustment required
- » Can be setup for either left or right hand operation
- » Can accept optional head-scoop
- » Supplied with secondary operation handle assembly which will allow the operator to lock the animal from behind the animal

### Optional

- » Head scoop can be fitted

Specification	Length	Width	Height	Weight
357G	810mm	760mm (Internal)	2000mm	225kg



## 323GL Head Scoop (Left Hand)



## 323GR Head Scoop (Right Hand)

### Features

- » Silent operation with non-ratchet locking mechanism
- » The Head Scoop has been designed to control the head of cattle making routine tasks easier and safer
- » The unit prevents an animal 'going down' in the cattle crate, and increases the efficiency of the handling process
- » The unit can be fitted to most makes of 'Automatic Yoke' cattle crates and can easily be removed when not required
- » Left or right side operation must be stated at time the of order
- » Weight 25kg
- » Supplied with a range of brackets, included in the price

### Optional

- » Weld-On Bracket Set 323G-200

RITCHIE cattle crates include a bracket set already welded in place as standard



Left hand head scoop displayed

## 333AL Aluminium in-race weigh platform

Includes load-bars



Digital indicator required, sold separately. Includes 600mm load bars

Specification	Length	Width	Height	Weight
333AL	2310mm	674mm	213mm	54kg

## 310G-200 Platform suitable for Mobile Cattle Crate

Includes load-bars



Designed to fit inside the race way of a Ritchie Mobile Cattle Handling Crate. Digital indicator required, sold separately. Includes 600mm load bars

Specification	Length	Width	Height	Weight
310G-200	3010mm	745mm	180mm	88kg

## 337G Highland Cattle Handling Crate



### Features

- » Heavy-duty head-lock bar incorporating a positive spring loaded catch mechanism
- » Designed to provide safety for the operator and minimise stress to the animal
- » Complete access to both sides of the animal
- » Rubber floor
- » Easily adjustable neck yoke, released by pedal operation
- » Ratchet type rump bar operation
- » Complete with rear gate

### Optional

- » Hoof Trim Kit 339G-880
- » Pair Rear Hoof Blocks 339G-900

Spec.	Length	Internal Width	Width	Height	Weight
337G	2150mm	700mm	1500mm	2040mm	370kg
337G-500	1930mm	-	-	1295mm	62kg



## Highland Cattle Race and Access Cubicle



337G-400 Access Cubicle

337G-500 Sheeted Hurdle

337G-600 Race Joiner

1054GP Joining Pin

### Features

#### Access Cubicle

- » Provides easy access to the rear of the cattle handling crate
- » Creates a secure area for the operator

#### Sheeted Hurdle

- » Fully welded construction
- » Clad in 1.6mm steel plate with safe edges formed all round

#### Race Joiner

- » Secures the race hurdles at the correct centres
- » Allows tapering in at the base of the hurdles. Ideal for younger stock



## Custom Cattle Handling System



Ritchie cattle handling systems improve operator safety and animal welfare increasing efficiency and reducing labour requirements.

### Features

- » Both standard and bespoke layouts available
- » All sheet metal supplied is safe edged
- » All sliding gates operate to both the left and right sides
- » Main forcing gate has ratchet locking system for added safety
- » Overall panel height is 1,625mm (other options available)



## Corral Systems



The Corral System will complement any Cattle Handling Crate to provide a safe and effective holding area and raceway handling facility. The system is easy to move and erect on site where required and can be easily modified to suit your requirements.

### Features

- » All hurdles are 6 railed x 1.62 m high
- » Skid plates are fitted at the base of the leg for easier movement by the operator
- » A funnel is incorporated into the raceway



Example of corral system used in conjunction with Ritchie Stock Cube

## Cattle Hurdles - 6 Rail

1050G - Open Railed 2.5m long

1050GSH - Sheeted 2.5m long

1045G - Open Railed 3m long

1045GSH - Sheeted 3m long

### Features

- » Fitted shoe at base for easier movement by operator
- » Robust hurdles for race and penning



## Cattle Hurdles - 8 Rail

1050GXL - Open Railed 2.5m long

1045GXL - Open Railed 3m long

### Features

- » Lamb bars
- » Extra height 1.8 m / 6'
- » Suitable for a wide range of animals





Specification	Overall Width	Gate Width	Height
1045G	3000mm	-	1620mm
1045GXL	3000mm	-	1830mm
1050G	2500mm	-	1620mm
1050GXL	2500mm	-	1830mm

## 1054 - Joining Pin

### Features

- » 20 mm solid round rod
- » 1380 mm long

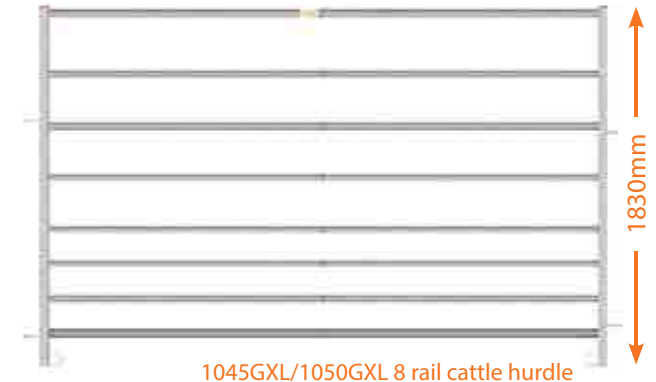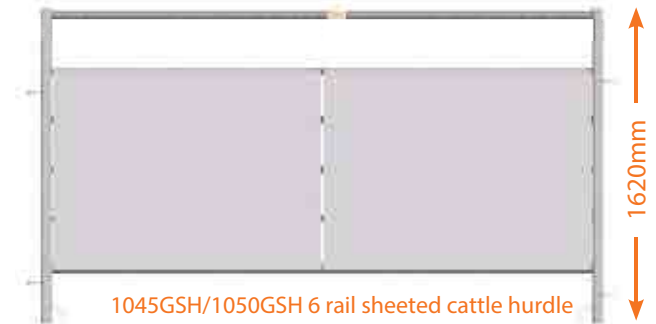

## 1046G Sliding Gate



### Features

- » Designed for incorporating into a cattle race to simplify cattle movement
- » Opens to both left and right sides
- » Substantially constructed, the assembly is easy to install using the joining lugs provided



## Hurdle Gates

1051G - 3.0m

1057G - 2.5m

1058G - 1.52m

### Features

- » Designed for access to corral or pen, or forming a funnel into a raceway
- » Single point hurdle fastening at each end
- » 2 m high for easy walk through




Specification	Overall Width	Gate Width	Height
1046G	1780mm	760mm	1970mm
1051G	3000mm	2800mm	2000mm
1057G	2500mm	2310mm	2000mm
1058G	1520mm	1330mm	2000mm

## 1040G High Loop Access Hurdle Gates



### Features

- » For pen or raceway applications offering clear access for both operator and animal

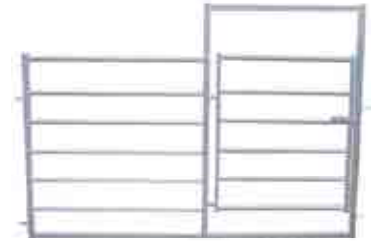

## 1059G - 0.76m

### Features

- » For pen or raceway applications offering clear access for both operator and animal



## Joining Loop

1055G - 0.76m

## Joining Loop

1056G - 1.52m

### Features

- » For joining hurdles in race and funnel



Specification	Overall Width	Gate Width	Height
1040G	3000mm	1220mm	1975mm
1059G	760mm	570mm	2000mm
1055G	760mm	-	1990mm
1056G	1520mm	-	1990mm


## 1060G 3m Calving Gate

### 1060G-SP15FT 4.4m Calving Gate




#### Main Features

- » Self locking head-yoke
- » Easily assembled into position using joining pins
- » Hinge round gate, lockable by chain offering good udder access for suckling calves
- » Unique fold-up lower section
- » Hot dipped galvanised finish

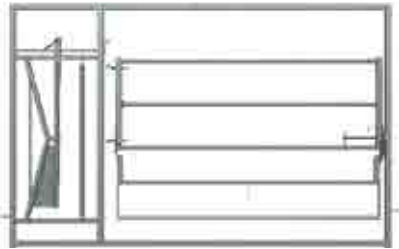

1060G

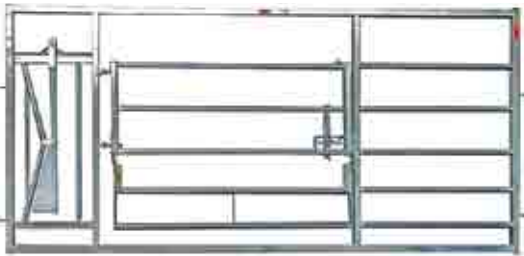

1060G-SP15FT

Specification	Overall Width	Gate Width	Height
1060G	3064mm	2108mm	1955mm
1060G-SP15FT	4395mm	2108mm	1955mm

## 320CALF Calving Cube



Allows a stockperson to calve a cow safely whilst she remains in her peer group. Can easily and safely transport cow and calf from calving area to a maternity area.

#### Main Features

- » Portable and easily attached to front loader with optional bolt on brackets
- » Easy to use and set up
- » Removable calving gate with self-locking head-yoke, hinge round gate, lockable by chain, offering good udder access for suckling calves
- » Multipurpose, can carry feed, bales, ATV and Ritchie hurdles

#### Optional Front Loader Brackets

Refer to page 15 for brackets types available

Specification	Length	Width	Height	Weight
320CALF	1500mm (transport) 4500mm (working)	2900mm	2100mm	900kg



## 345G Calf Weigh Crate

### 345GE Calf Weigh Crate



#### Main Features

- » Optional neck yoke for dehorning
- » Strong tubular steel frame with fully sheeted sides
- » Entry gate hinges from either the left or right sides
- » Mesh-type floor
- » Fitted with handles and wheels for easy movement
- » Choice of indicators supplied separately (GE model only)



**345G**  
Fitted with a Ritchie digital load cell and indicator



**345GE**  
Fitted with 150kg load cell, requires indicator



**345G-100 Yoke Gate**  
Optional for  
345G and 345GE

Specification	Length	Width (overall)	Width (opening)	Height
345G	1550mm	450mm	-	1010mm
345GE	1550mm	450mm	-	1010mm

## 347G Calf Dehorning Crate



#### Main Features

- » The neck yoke is operated by single lever which automatically locks at any position and, is silent
- » Hinged exit door
- » Complete with belly band and rump strap
- » Good access for dehorning and castrating

#### Optional

- » Wheel Kit 667G-200



Specification	Length	Width (overall)	Width (opening)	Height
347G	1150mm	380mm	-	1090mm

## 340G Calf Creep Feeder



### Main Features

- » Robust all steel construction, hot dipped galvanised finish
- » Full-length trough fed from approximately 300kg capacity hopper
- » Bird-proof hopper is filled from a weatherproof, easily operated, sliding door at the rear of the feeder
- » Adjustable header rail and adjustable width creep bars
- » Fitted with skids and lifting frame for easy movement
- » Recommended to be fixed down in exposed locations

Specification	Length	Width	Height	Capacity
340G	2440mm	1930mm	1400mm	300kg



## 380G High Density Feeder



### Main Features

- » Suitable for large square bales
- » Supplied in 4 bolt together sections
- » Each section is fully welded

Spec.	Length	Width	Height	Skirt Depth
380G	3000mm	1500mm	1500mm	680mm



## 1049G Calf Creep Hurdle

### Main Features

- » Robust unit with easily adjusted header rail to exclude cows from the feed area
- » Easily located using joining pins



Spec.	Width	Height	Gate Width
1049G	2400mm	1620mm	428mm

## 388G Heavy Tombstone Feed Ring



### Main Features

- » Heavy-duty circular feed ring
- » 10 feed spaces
- » Solid sheet metal skirt ribbed for strength
- » Ideal for horned cattle and calves
- » Fully welded fabrication
- » Supplied in five sections for easy assembly

Specification	Height	Diameter	Skirt Depth	Head Space Width
388G	1195mm	2167mm	565mm	324mm



## Diagonal Feed Barriers




2410G-10'  
2415G-15'  
2420G-20'



Without skirt

2510G-10' with skirt  
2515G-15' with skirt  
2520G-20' with skirt

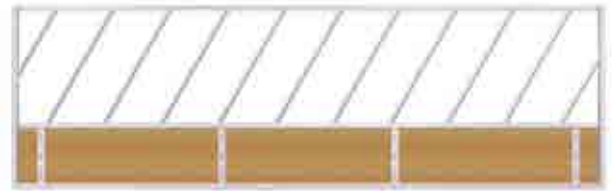

With skirt

### Main Features

- » Heavy-duty, quality diagonal railed barriers
- » Available with or without timber skirt attached
- » Barrier ends are sold separately

Spec.	Length	Height	Height with timber	Skirt Depth
2410G	3000 - 3284mm	915mm	-	-
2415G	4452 - 4736mm	915mm	-	-
2420G	5882 - 6166mm	915mm	-	-
2510G	3000 - 3284mm	-	1375mm	500mm
2515G	4452 - 4736mm	-	1375mm	500mm
2520G	5882 - 6166mm	-	1375mm	500mm

## Hook-On Manger Units

394G-110 10' 394G-100 15'



### Main Features

- » Heavy-duty, quality construction
- » Compatible with diagonal and standard barriers
- » Fits with 2510G, 2515G, 2520G fixed feed barriers




Specification	Length	Width	Height
394G-100	4420mm	669mm	505mm
394G-110	2968mm	669mm	505mm

## Barrier Ends

2515G-A02 - Bolt Through End

2515G-A04 - Hurdle Lug End

2515G-A05 - Right Angle Bolt Through End

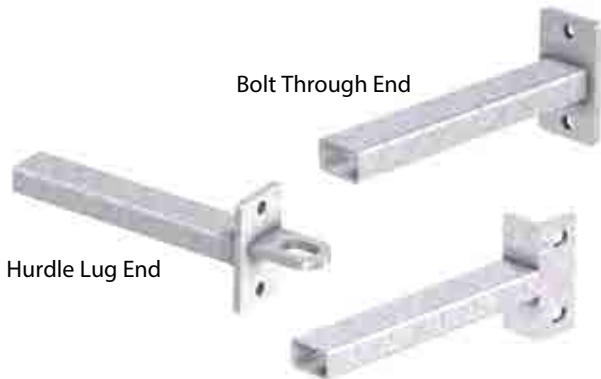

Bolt Through End

Hurdle Lug End

Right Angle Bolt Through End

## HDPE Trough

4002P - 610mm,

4004P - 1220mm

4006P - 1830mm



### Main Features

- » Robust, HDPE moulded feed and liquid trough
- » No sharp corners to trap feed and easy to clean
- » Deep hanging hooks to fit over fencing



Spec.	Length	Width	Depth	Weight	Capacity
4002P	600mm	370mm	185mm	3kg	22 litres
4004P	1230mm	370mm	185mm	5.2kg	48 litres
4006P	1800mm	370mm	185mm	7.7kg	72 litres



### 303G Double Basin Trough



**Main Features**

- » Manufactured from 16 BG steel sheet with 50mm x 50mm hollow section legs



### 306G Calf Feeding Trough 2.5m Long



**Main Features**

- » Free standing or wall mounted, advise on ordering
- » Manufactured from 16 BG steel sheet with 30mm x 30mm hollow section legs



Specification	Length	Width	Height	Weight
303G	2500mm	840mm	840mm	81kg
306G	2500mm	380mm	555mm	32kg

Optional - Wall mounting bracket set 305G-50

### 784 General Purpose Drinker includes brass ball valve



**Main Features**

- » Self-contained heavyweight drinker made from steel sheet
- » Suitable for sows, pigs, sheep or calves
- » Full width removable lid
- » Two wall fixing holes in back of drinker
- » 330 x 355 x 190 mm
- » 10 litres



### Standard Water Trough 732, 733, 734, 735, 736, 732P-12, 732P-9




### Standard Deep Trough 753, 754, 756, 758. 732P-12, 703P-8



**Main Features**

- » Raised service box can be located at the end or in the centre
- » Drain plug fitted

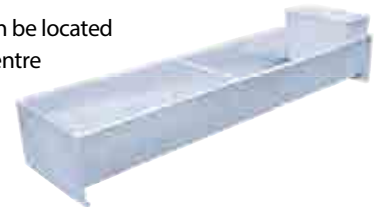

Spec.	Length	Capacity	Spec.	Length	Capacity
732	610mm	50 litres	753	915mm	137 litres
733	910mm	75 litres	754	1.22 m	183 litres
734	1.22 m	100 litres	756	1.83 m	274 litres
735	1.52 m	125 litres	758	2.44 m	366 litres
736	1.83 m	150 litres	703P-8	Service Box to suit	
732P-9	Service Box to suit		732P-12	Brass Ball Valve to suit	
732P-12	Brass Ball Valve to suit				

## 4669G Combi Clamp



### Main Features

- » A large foot treadle allows the operator freedom of movement whilst restraining the animal for treatment
- » The Combi Clamp width is fully adjustable to suit different sizes of sheep
- » The Combi Clamp linkage is adjustable to suit different weights of operator
- » Easy to use for dagging, drenching, vaccinating and tagging
- » Simple non-return hock bar
- » Can be set-up for left or right hand operation
- » Includes auxiliary frame assembly with orange tubs
- » Supplied with rubber floor\*

\*Replacement rubber floor kits are available for older clamps

Specification	Length	Width	Height	Weight
4669G	3800mm	1300mm	1100mm	200kg



## 669G-500 Curved sheep panels for Combi Clamp



### Main Features

- » Ideal for directing sheep through the Combi Clamp
- » Safe edged sheeting
- » Heavy-duty panels
- » Set includes an inner and outer sheeted panel
- » One set will turn sheep 90° at a radius of 1.6m approx. where space allows



## 4669G-300

### 3 Way Shedding Gate



#### Main Features

- » This gate attaches easily to the exit end of the Combi Clamp
- » It is operable from the working position at the clamp
- » This gate allows easy drafting to either side or a straight run-through




## 4669G-400EKIT

### 3 Way Powerdraft\*

#### Main Features

- » Powerdraft Conversion Kit can be fitted to manual draft gates, and is powered by 12v battery in conjunction with Tru-Test JR5000 or XR5000 indicator



\*Excludes 4669G-300, Indicator and Battery

## 4669G-800

### Weigh Frame

## 4669G-800LB

### Weigh Frame with load bars



#### Main Features

- » Frame for the Combi Clamp and load bars to sit on (load bars not supplied with 4669G-800 model - included only with 4669G-800LB)
- » Separates lead-up ramp and shedding gate from the Combi Clamp to prevent these interfering with the weight measurement



## 669G-100 Reduced Height Cushion for lambs



- » Reduced Height Cushion Wall is 570mm (150mm lower than standard height).
- » Ideal for handling lambs or horned sheep



## 4669G-700 Offroad/ATV Combi Clamp Trailer



### Main Features

- » Can set trailer up for left to right or right to left hand operation
- » Fast and easy setup for field operation or trailer movement
- » Lift / lower via push button control using 12v battery (not included) and hydraulic cylinder
- » Can incorporate digital weighing and EID
- » Operator works on the clamp at ground level
- » Attaches via 50mm coupling

### Combi Clamp not included

Specification	Length	Width	Height	Weight
4669-700G without Combi Clamp	4275mm	1945mm	1350mm	260kg
4669-700G with Combi Clamp	4275mm	1945mm	2750mm	570kg*

\* with Combi Clamp and shedding gate



## 3669G-A2000 Road Legal Trailer



### Main Features

- » Fully type-approved for road transport (<750kg)
- » Hydraulic ram lift/lowering of wheels
- » Combi Clamp, 3-way shedder and lead up ramp stay in line ready to use once the trailer is lowered
- » Set up for left or right hand operation
- » Can carry up to 12 Ritchie Aluminium Hurdles
- » Suitable for weighing setup

### Combi Clamp not included

Specification	Length	Width	Height	Weight unladen	Weight gross
3669G-A2000	5400mm	2060mm	490mm	305kg	750kg



## 3662G Digital Lamb Weigher



### Main Features

- » Robustly constructed and easy to use
- » Designed for building into a race
- » Mesh floor
- » Wheels and fold away handles
- » Easy to operate entry and exit gates
- » Aerosol holders

Specification	Length internal	Width internal	Height internal	Weight
3662G	1100mm	390mm	735mm	69kg



## 3661G Digital Lamb Weigher



### Main Features

- » Based on the 3662G model
- » Unit shown fitted with Tru-Test load cell
- » Choice of digital indicators available

Specification	Length internal	Width internal	Height internal	Weight
3661G	1100mm	390mm	735mm	69kg



## 3664G Draft Pro 3 Guillotine Gate Entry



## 3665G Draft Pro 3 Swing Gate Entry

### Main Features

- » 2 entrance gate options available
- » 4-point weighing for improved accuracy
- » 3-way drafting for increased efficiency
- » EID compatible
- » Choice of digital indicators to suit
- » Can be mobile or permanently fixed
- » Mesh flooring provides a cleaner and drier solution for animals
- » Large diameter wheels for easy manoeuvring
- » Fold-away handles

Specification	Length internal	Width internal	Height internal	Weight
3664G/3665G	1305mm	412mm	756mm	105kg



3664G pictured with optional ShearWeigh Weigh Head

## 3663G Pig & Lamb Weigher (Digital)



### Main Features

- » Easy-to-read digital display powered by 3 x AAA batteries
- » Entry gate slides upwards and animal enters onto a stable expanded metal floor
- » Hinged exit gate
- » Long fold away handles and large diameter wheels for easy movement

Specification	Length internal	Width internal	Height internal	Weight
3663G	1280mm	410mm	765mm	90kg



Conversion kits for other weigh-heads are available. Contact the office for details

## Portable Sheep Race




### Main Features

- » Raceway sides can be adjusted for width
- » All sheet metal is 'safe edged'
- » Joining stakes have length for driving into the ground

### Optional

- » Remote Control Lever 3169G-100
- » Foot Rot Bath 521

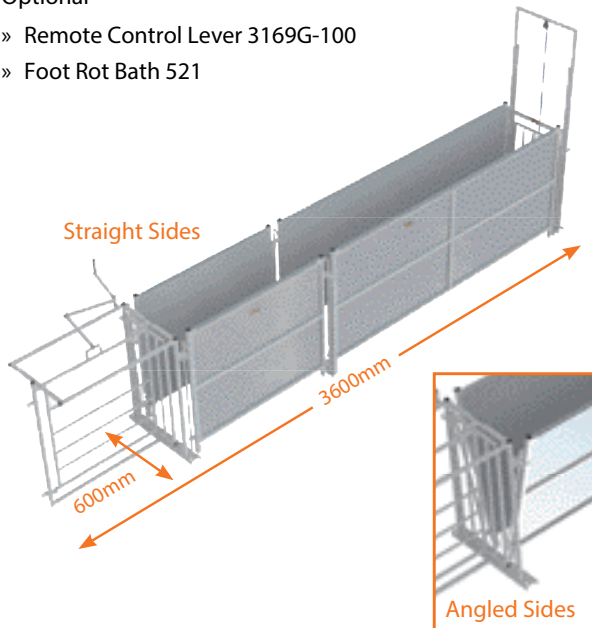

A 3.6 m long sheep race can easily be assembled using the following components:

- » 2 x 1.2 m Sheeted Hurdles 3114G
- » 2 x 2.4 m Sheeted Hurdles 3118G
- » 1 x Race Joiner 3150G
- » 6 x Joining Pins 155GP
- » 1 x 0.6 m Guillotine Gate 3163G
- » 1 x Draft / Stop Gate 3169G

## Portable Starter System




### Main Features

- » Raceway sides can be adjusted for width
- » All sheet metal is 'safe edged'
- » Joining stakes have length for driving into the ground
- » Posts are recommended for permanent installations

### Optional

- » Remote Control Lever 3169G-100
- » Foot Rot Bath 521

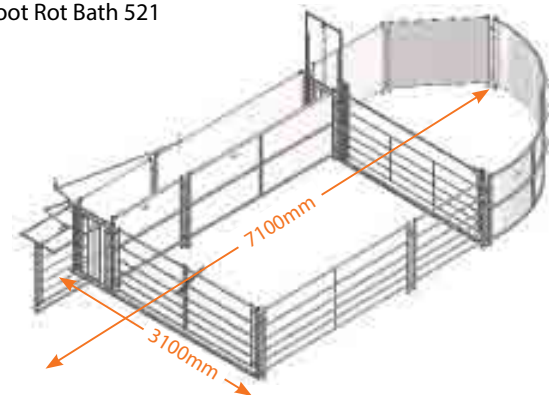

A Portable System can be assembled using the following components:

- » 4 x 1.2 m Sheeted Hurdles 3114G
- » 2 x 2.4 m Sheeted Hurdles 3118G
- » 1 x 1.2 m Open Rail Hurdle 3124G
- » 1 x 2.4 m Open Rail Hurdle 3128G
- » 1 x Race Joiner 3150G
- » 15 x Joining Pins 155GP
- » 1 x 0.6 m Guillotine Gate 3163G
- » 1 x 2.4 m Lift / Slide Gate 3183G
- » 1 x 2.5 m Two Part Gates in Frame 3181G
- » 1 x Draft / Stop Gate 3169G
- » 2 x Curved Panels 3179G

## Trombone Sheep System




### Main Features

- » Raceway sides can be adjusted for width
- » All sheet metal is 'safe edged'
- » Joining stakes have length for driving into the ground

### Optional

- » Remote Control Lever 3169G-100
- » Foot Rot Bath 21

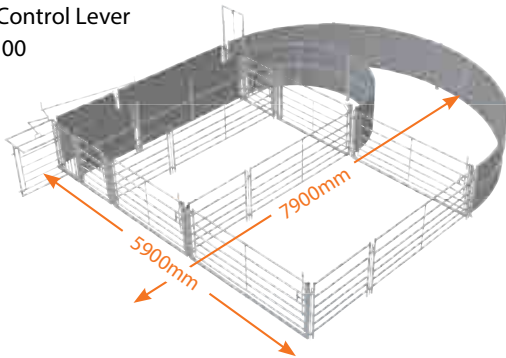

A Trombone Handling System can be assembled using the following components:

- » 2 x 1.2 m Sheeted Hurdles 3114G
- » 2 x 2.4 m Sheeted Hurdles 3118G
- » 3 x 1.2 m Open Rail Hurdles 3124G
- » 3 x 2.4 m Open Rail Hurdles 3128G
- » 1 x Race Joiner 3150G
- » 18 x Joining Pins 155GP
- » 1 x 0.6 m Guillotine Gate 3163G
- » 2 x 2.4 m Swing Gate in Frame 3165G
- » 1 x 1.8 m Swing Gate in Frame 3162G
- » 2 x 0.9 m Swing Gate in Frame 3160G
- » 1 x Draft / Stop Gate 3169G
- » 2 x Inner Curved Panels 3177G
- » 4 x Outer Curved Panels 3178G
- » 4 x Joining Pin Link Brackets 3178G-200
- » 1 x 1.8m Lift / Slide Gate 3180G

## Extended Trombone Sheep System




### Main Features

- » Same as Standard Trombone System (opposite)

### Optional

- » Remote Control Lever 3169G-100
- » Foot Rot Bath 521

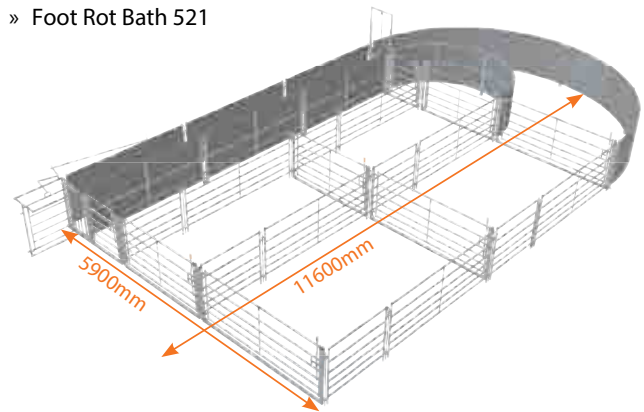

An Extended Trombone Handling System can be assembled using the following components:

- » 6 x 2.4 m Sheeted Hurdles 3118G
- » 6 x 1.2 m Open Rail Hurdles 3124G
- » 6 x 2.4 m Open Rail Hurdles 3128G
- » 2 x Race Joiners 3150G
- » 26 x Joining Pins 155GP
- » 1 x 0.6 m Guillotine Gate 3163G
- » 3 x 2.4 m Swing Gate in Frame 3165G
- » 2 x 1.8 m Swing Gate in Frame 3162G
- » 2 x 0.9 m Swing Gate in Frame 3160G
- » 1 x Draft / Stop Gate 3169G
- » 2 x Inner Curved Panels 3177G
- » 4 x Outer Curved Panels 3178G
- » 4 x Joining Pin Link Brackets 3178G-200
- » 1 x 1.8m Lift / Slide Gate 3180G

## Sheep Pen with 180° Race and Combi Clamp




### Main Features

- » All sheet metal is 'safe edged'
- » Joining stakes have length for driving into the ground

### Optional

- » Foot Rot Bath - 521

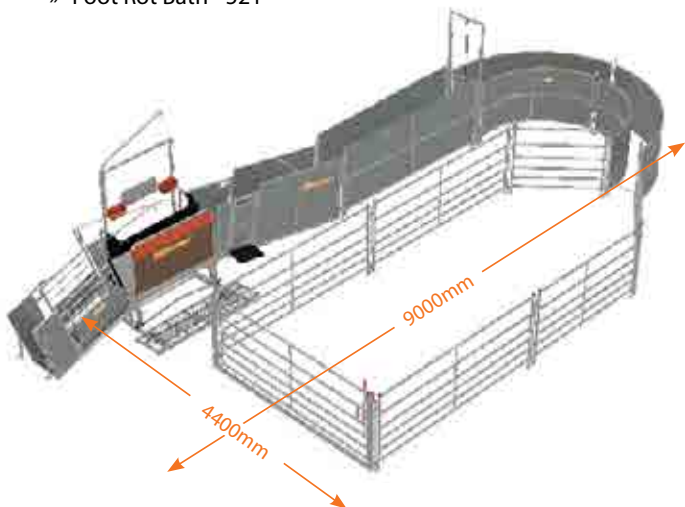

This handling system can be assembled using the following components:


- » 2 x 2.4 m Sheeted Hurdles 3118G
- » 1 x 1.2 m Open Rail Hurdles 3124G
- » 2 x 1.8 m Open Rail Hurdles 3126G
- » 3 x 2.4 m Open Rail Hurdles 3128G
- » 10 x Joining Pins 155GP
- » 1 x 0.6 m Guillotine Gate 3163G
- » 1 x 2.5 m Hinged Gate in Frame 3165G
- » 2 x Combi Clamp Curved Panel Set 669G-500
- » 1 x Combi Clamp c/w Aux. Frame 4669G
- » 1 x 3-Way Shedding Gate 4669G-300

## Trombone Sheep System with Combi Clamp



### Main Features

- » All sheet metal is 'safe edged'
- » Joining stakes have length for driving into the ground

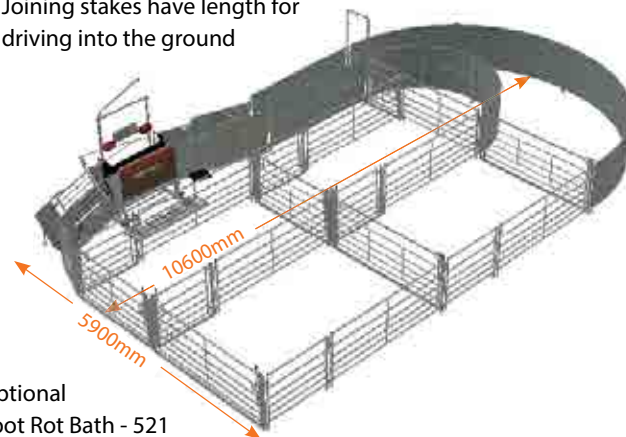

### Optional

- » Foot Rot Bath - 521

This Trombone Handling System can be assembled using the following components

- » 2 x 2.4 m Sheeted Hurdles 3118G
- » 2 x 1.2 m Open Rail Hurdles 3124G
- » 1 x 1.8 m Open Rail Hurdles 3126G
- » 22 x Joining Pins 155GP
- » 2 x 0.9 m Swing Gate in Frame 3160G
- » 4 x 1.25 m Swing Gate in Frame 3161G
- » 1 x 1.8 m Hinged Gate in Frame 3162G
- » 1 x 0.6 m Guillotine Gate 3163G
- » 1 x 2.5 m Hinged Gate in Frame 3165G
- » 2 x Inner Curved Panels 3177G
- » 4 x Outer Curved Panels 3178G
- » 4 x Joining Pin Link Brackets 3178G-200
- » 1 x 1.8m Lift / Slide Gate 3180G
- » 2 x 2.5m Lift / Slide Gate 3183G
- » 1 x Combi Clamp c/w Aux. Frame 4669G
- » 1 x 3-Way Shedding Gate 4669G-300

## Sheeted Hurdle

3114G - 1.25m  
3116G - 1.8m  
3118G - 2.5m



### Main Features

- » For use mainly in race

Specification	Length	Height
3114G	1250mm	1015mm
3116G	1800mm	1015mm
3118G	2500mm	1015mm


## Open Rail Hurdle

3124G - 1.25m  
3126G - 1.8m  
3128G - 2.5m  
3132G - 3.6m



### Main Features

- » For use mainly in penning

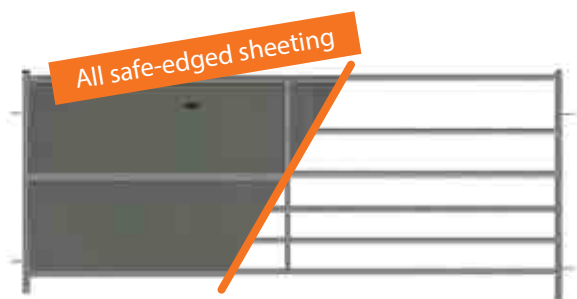

Specification	Length	Height
3124G	1250mm	1010mm
3126G	1800mm	1010mm
3128G	2500mm	1010mm
3132G	3600mm	1010mm

## 3306AL 6' Aluminium Hurdle



### Main Features

- » Manufactured in lightweight, heat-treated aluminium for increased rigidity
- » Robust hurdles for race and penning
- » Complete with joining pin and bracket



Specification	Length	Height
3306AL	1800mm	950mm

## Economy Lamb Pen Hurdles

3124GX (4') - 1.25m      3125GX (5') - 1.5m  
3126GX (6') - 1.8m      3128GX (8') - 2.5m

### Main Features

- » Pin together for easy assembly (pin included)
- » 7 horizontal rails with an overall height of 968mm which allows for easy access to and from pens
- » Internal venting for improved biosecurity



Specification	Length	Height
3124GX	1250mm	968mm
3125GX	1500mm	968mm
3126GX	1800mm	968mm
3128GX	2500mm	968mm


### Lift / Slide Gate

3180G - 1.8m  
3183G - 2.5m



**Main Features**

- » Ideal for working in confined areas

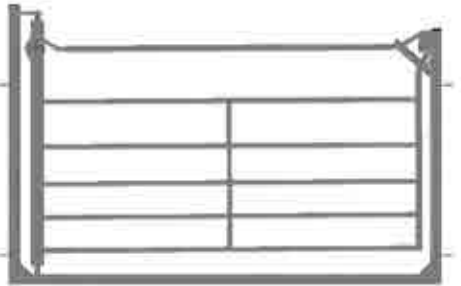

### Swing Gates in Frame

3158G - 0.6m  
3160G - 0.9m  
3161G - 1.25m  
3162G - 1.8m  
3165G - 2.5m



**Main Features**

- » Positive top operated spring-loaded bolt catch
- » Removable gate stop fitted
- » Gate adjustment on the bottom hinge

Specification	Length	Hinged gate width	Height
3180G	1800mm	1715mm	1170mm
3183G	2500mm	2320mm	1170mm
3158G	600mm	485mm	1000mm
3160G	900mm	695mm	1000mm
3161G	1250mm	1030mm	1000mm
3162G	1800mm	1655mm	1000mm
3165G	2500mm	2280mm	1000mm


### Two-Part Gates in Frame

3181G - 2.5m



**Main Features**

- » Positive top operated throwover catch
- » Gate adjustment on bottom hinge

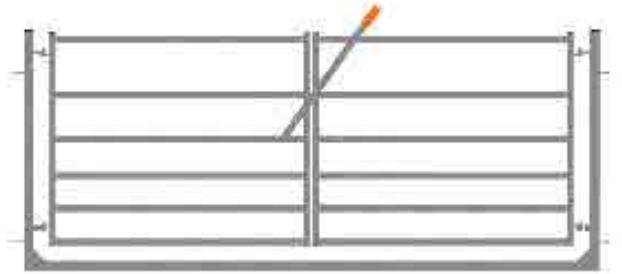


### Hurdle and Gate Combination

3182G - 2.5m



**Main Features**

- » Positive top operated spring-loaded bolted catch
- » Gate adjustment on bottom hinge

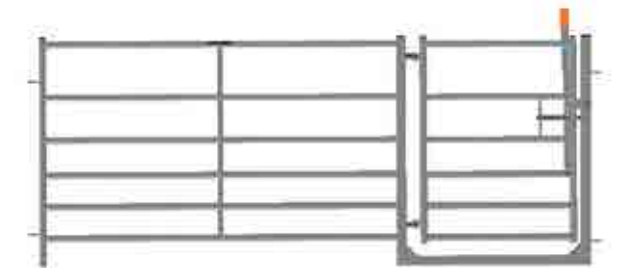

Specification	Length	Hinged gate width	Height
3181G	2500mm	2230mm	1000mm
3182G	2500mm	770mm	1000mm

## Guillotine Gates with Rope

3163G - 0.6m wide



### Main Features

- » For fast effective control and movement
- » Has varying hole positions to allow for a tapered width race
- » Supplied with rope for remote control



3163G



3149G

## Walk Through Guillotine

3149G - 0.6m wide



### Main Features

- » For lightness and speed of operation, the gate hinges to allow the operator easy access to and from the raceway
- » Has varying hole positions to allow for a tapered width race
- » Supplied with rope for remote control

Specification	Width	Height
3163G	600mm	1800mm
3149G	600mm	1990mm

## Three Way Drafting Gate

3167G - 0.6m wide

### Main Features

- » Three-position gate for shedding sheep to either side or straight through




## Draft / Stop Gate

3169G - 0.6m wide

### Main Features

- » For shedding to the left or right side, or for holding sheep in the race
- » Adjustment to slope the sides of the raceway



## Non-Return Gate

166 - 0.6m wide

### Main Features

- » Supplied in pairs
- » Spring-loaded gates offering one direction travel only
- » Easy to install at any point using a joining pin on the system



Specification	Width	Height
3167G	600mm	900mm
3169G	670mm	900mm
166	600mm	585mm

## Curved Panels

3177G - Curved Inner Panel

3178G - Curved Outer Panel

Both required for Trombone Systems.

3178G-200 - Joining Pin Link Bracket

3179G - Curved Panel

Required for Starter Systems.



3177G



3178G



3179G

3178G-200


Specification	Width	Radius	Height
3177G	1970mm	1360mm	1015mm
3178G	2240mm	2900mm	1015mm
3178G-200	50mm	-	645mm
3179G	1770mm	1640mm	1015mm

## 521 - Foot Rot Bath



### Main Features

- » Timber ladder fitted with cross bars for added grip
- » Timber painted black to reduce reflections from the liquid

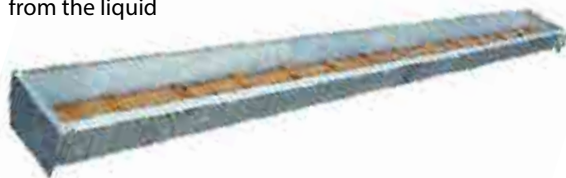

Specification	Length	Width	Height
521	3600mm	330mm	160mm

## 155GP - Joining Pin



### Main Features

- » Manufactured from 16mm diameter steel
- » Designed with extra length to drive into the ground
- » Umbrella type handle for easy removal



## 3150G - Race Joiner



### Main Features

- » Keeps the raceway hurdles at fixed centres
- » Has varying hole positions to allow for a tapered width race



Specification	Width	Height
155GP	16mm diameter	975mm
3150G	660mm	835mm

## Posts

3172G

Two lugs on one side of the post designed for 'building in'

3172GA

Two lugs on two sides of the post designed for 'building in'

3172GB

Two lugs on one side designed for 'bolting down'

3172GC

Two lugs on two sides designed for 'bolting down'



3172G 3172GA 3172GB 3172GC

## 173G Cap and Socket

### Main Features

- » 178mm square ground socket with cap
- » To take 50mm x 50mm square posts, with a steel cap to close off when not in use



## 667G Sheep Turn-Over Crate




### Main Features

- » Designed for easy installation within a sheep race
- » Entry from left or right side
- » Variable height adjustment
- » Unique 3-point pivot mechanism provides good clearance between the animal and the side of the race
- » Expanded metal floor

### Optional

Wheel Kit 667G-200

Specification	Length internal	Width internal	Width transport	Height internal
667G	1570mm	1570mm (working)	675mm	1070mm

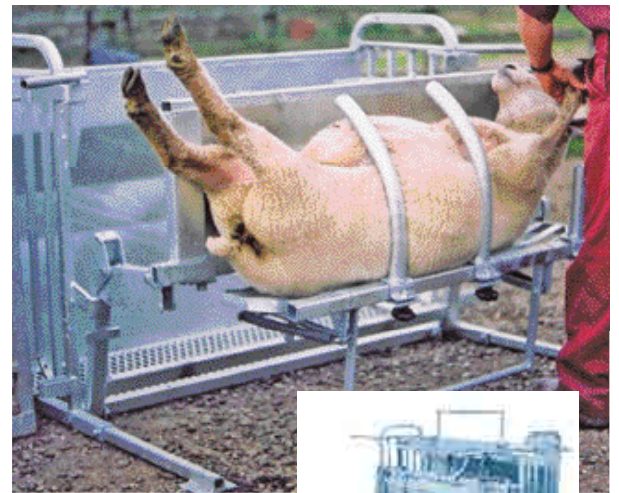

## 401G Walk Through Feeder



### Main Features

- » Fully galvanised
- » Trough from floor 450mm

### Optional

End Gate 401G-100

Specification	Length	Width	Height	Weight
401G	2448mm	730mm	1000mm	56kg



## Adjustable Horizontal Rail Sheep Feed Barrier




3510G - 3m  
3515G - 4.5m

### Main Features

- » Adjustable M16 eyebolts to facilitate easy installation
- » Easily adjustable height feed rails
- » Fentex treated timber panels

Specification	Length frame	Height	Skirt depth
3510G	2920mm	1010mm	320mm
3515G	4445mm	1010mm	320mm

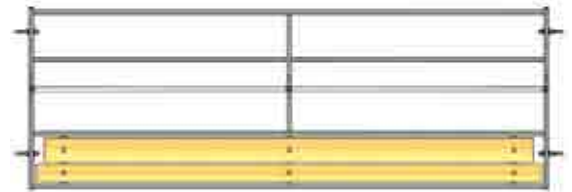

3510G



## Tipping Feed Barriers

3710G - 3m  
3715G - 4.5m



### Main Features

- » Feeding trough section pivots in and out of the pen, allowing trough to be filled outside of the pen and then moved to the ewes
- » Locks with a spring bolt
- » Comes with adjustable eyebolts and can be used as a hurdle or hinged for a gate



## Vertical Rail Sheep Feed Barrier

3610G - 3m  
3615G - 4.5m  
3615G-100 4.5m c/w access gate




### Main Features

- » Adjustable M16 eyebolts to facilitate easy installation
- » Internally vented
- » Fentex treated timber panels



3610G / 3615G



3615G-100

Specification	Length frame	Height	Skirt depth	Gate width
3610G	2920mm	980mm	315mm	-
3615G	4445mm	980mm	315mm	-
3615G-100	4445mm	980mm	315mm	815mm

## 437G Diagonal Railed Feed Ring for Sheep



### Main Features

- » Diagonal railed to reduce waste
- » Solid sheet metal skirt
- » Supplied in two halves for easy pin together assembly

Specification	Height	Diameter	Skirt depth	Weight
437G	900mm	1850mm	300mm	57kg



## 438G Feed Ring for Horned Sheep



### Main Features

- » Heavy-duty circular sheep feed ring
- » Solid sheet metal skirt
- » Supplied in two halves for easy pin together assembly

Specification	Height	Diameter	Skirt depth	Weight
438G	900mm	1550mm	300mm	41kg



## 439G Sheep Feed Ring



### Main Features

- » Heavy-duty circular sheep feed ring
- » Solid sheet metal skirt
- » Supplied in two halves for easy pin together assembly
- » 24 feed spaces

Specification	Height	Diameter	Skirt depth	Weight
439G	900mm	1550mm	300mm	43kg



## 442G Bale Cradle Feeder



This bale cradle is ideal for the quick and easy feeding of sheep. The sturdy design and extra high sides maintains feed and reduces wastage

### Main Features

- » Extra high sides 1.25 m to help contain any spillage
- » All hot dipped galvanised after manufacture
- » Supplied in kit form for easy self-assembly

Specification	Height	Diameter	Skirt depth	Weight
442G	1610mm	1580mm	1250mm	71kg



## Lamb Creep Hurdle

3450G - 1.2m  
3451G - 2.5m



### Main Features

- » Robustly constructed tubular steel frame
- » Easily adjusted spacing between the rollers
- » The steel rollers offer 3 width settings of 150mm, 190mm and 225mm

### Optional

Joining Pin 155GP



3450G



3451G

Specification	Length	Width	Height	Weight
3450G	50mm	1200mm	1000mm	15kg
3451G	50mm	2400mm	1000mm	26kg


## 3100G LamPram



### Main Features

- » Convenient trolley for carrying lambs safely between pens
- » Less stress on the lambs and ensures that they don't get disorientated
- » Ewes calmly follow the lambs in the pram
- » Keeps hands free for opening gates
- » Plenty of other uses around the farm!

Specification	Length	Width	Height	Weight
3100G	725mm	510mm	540mm	19kg

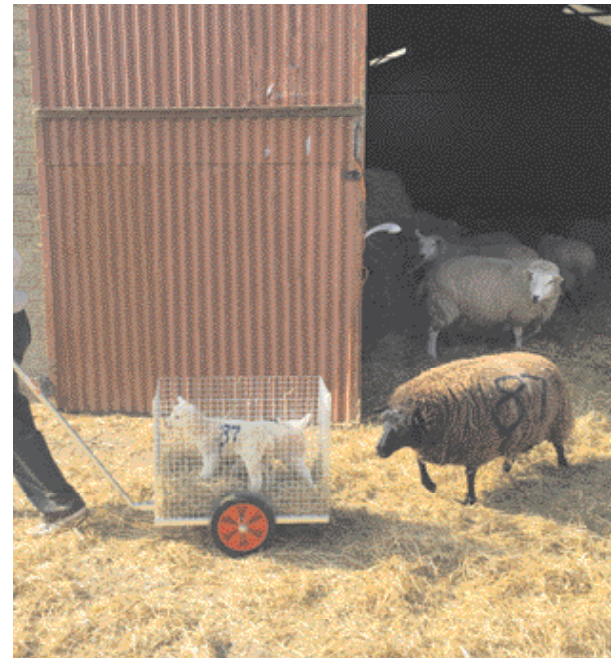

## 465G Lamb Adopter



### Main Features

- » Simple frame fixes over hurdles with 2 pins
- » Sheeted panels prevent visual distraction of the ewe
- » Simple, easily adjusted 4-position neck yoke (70mm to 153mm widths) allows head movement whilst effectively restraining the ewe
- » Round tube rails radiused for safety and strength limit body movement without restricting lamb access

### Optional

Joining Pin 155GP



## Tubar 7 Railed Heavy-Duty Gates

1603G 3' wide to 1616G 16' wide



## Half Meshed Gates

1723G 3' wide to 1736G 16' wide



### Main Features

- » Designed to reduce the risk of tail or ear-tag traps
- » 'Bushed' hanging end
- » Internal venting to the structure
- » Supplied with 2 adjustable hangers
- » 20mm spring loaded slip bolt

Spec.	FB	Top and bottom rail	Intermediate rail	RHS	Mesh
Half Mesh	40 x 4mm	40 x 1.2mm	30 x 1.2mm	50 x 30 x 2mm	2" x 2" 10 Gauge
Tubar 7 Railed	40 x 4mm	42.4 x 1.5mm	33.7 x 1.5mm	50 x 30 x 2mm	-

## Midland Standard Gates

1703G 3' wide to 1716G 16' wide



### Main Features

- » Designed to reduce the risk of tail or ear-tag traps  
'Bushed' hanging end
- » Internal venting to the structure
- » Supplied with 2 adjustable hangers
- » 20mm spring loaded slip bolt



Spec.	FB	Top and bottom rail	Intermediate rail	RHS	Mesh
Midland	40 x 4mm	40 x 1.2mm	30 x 1.2mm	50 x 30 x 2mm	-

## Gate Posts

1612GP-500

Round post,  
hang and latch



1612G-500



1612GP-510

Round post, security hang  
one side, latch opposite

1612G-510



8138G-8P

Round post,  
latch both sides

8138G-8P



8138G-A130P

Square post,  
latch both sides

8138G-A130P



8138G-A101P

Square post,  
hang one side

8138G-A101P



8138G-A101SP

Security hang post

8138G-A101SP



8138G-A102P

Square post hang  
on two sides

8138G-A102P



9619G-A50

Square hang post  
for deer gates

9619G-A50



9619G-A51

Square slam post  
for deer gates

9619G-A51



Specification	Shape	Length	Size	Hinge Centres
1612GP-500	Round	2000mm	114.6mm dia	960mm
1612GP-510	Round	2000mm	114.6mm dia	960mm
8138G-8P	Round	2000mm	114.6mm dia	960mm
8138G-A130P	Square	2000mm	100 x 100mm	960mm
8138G-A101P	Square	2000mm	100 x 100mm	960mm
8138G-A101SP	Square	2000mm	100 x 100mm	960mm
9619G-A50	Square	3000mm	120 x 120mm	1590mm
9619G-A51	Square	3000mm	100 x 100mm	1590mm


## Ground Socket 8138G-A500



### Main Features

- » 600mm deep square ground socket
- » To take 100mm x 100mm square posts with a steel cap to close off when not in use

Cap is sold separately as shown below

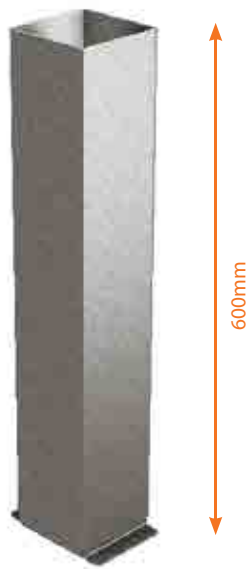

## Cap only 8138G-A500CAP



## 1612G-800 Lift n Slide Gate Hasp



### Main Features

- » Used in a typical two-part gate arrangement
- » Can be set up for left or right hand operation
- » Lightweight
- » No finger traps making it a safe unit to operate
- » Stock proof catch
- » Facility to add padlock for additional security

Specification	Length	Width	Height	Weight
1612G-800	600mm	260mm	354mm	7kg



### Optional

A padlock can be fitted through the standard hole for extra security.

## Telescopic Gates



### Main Features

- » Space saving telescopic design
- » Available in multiple sizes
- » Strong and secure build - robust frame and reliable locking

Specifications	Dimensions	Height	Weight
1623GT	Min 2m 3m Max	1.14m	35kg
1634GT	Min 3m 4m Max	1.14m	45kg
1645GT	Min 4m 5m Max	1.14m	53kg

Specifications	
Outer slide rails	CHS Ø42.4 x 1.5mm
Inner slide rails	CHS Ø33.7 x 1.5mm
End posts	RHS 50 x 30 x 2mm
Bracing bars	FB 60 x 5mm



## Deer Gates



### Main Features

- » Padlockable
- » 'Bushed' hanging end
- » Internal venting to the structure
- » Supplied with 2 adjustable hangers
- » 20mm spring loaded slip bolt

Size	10 Rail Gates	Part Mesh 7 Rail Gates	Full Mesh Gates
4' wide	-	-	2604GFM
10' wide	2610GRAIL	2610GPM	2610GFM
12' wide	2612GRAIL	2612GPM	2612GFM
14' wide	2614GRAIL	2614GPM	2614GFM

Specifications			
FB	40 x 3mm	40 x 3mm	-
Tube	40 x 1.2mm	40 x 1.2mm	-
Tube	30 x 1.2mm	30 x 1.2mm	-
RHS	50 x 30 x 2mm	50 x 30 x 2mm	40 x 40 x 3mm
Mesh	-	50mm x 50mm x 10 Gauge	50mm x 50mm x 10 Gauge



10 Rail Gates



Part Meshed 7 Rail Gates



Full Meshed Gates



4ft Fully Meshed Pedestrian Gate

## 2605GSC - Self-Closing Pedestrian Gate



### Main Features

- » Supplied ready assembled, ready for installation
- » 1.5 m internal clearance for pedestrian, quad or equine through passage
- » Gate hinges through 180°
- » Fitted with 50mm x 50mm mesh
- » Rabbit restricted with only 45mm clearance at base

Specification	Overall width	Internal width	Height	Weight
2605GSC	1815mm	1500mm	1900mm	120kg



## 1745GSC - 1.5m Self-Closing Pedestrian Gate




### Main Features

- » Fitted with 50mm x 50mm mesh – safe and secure
- » Hot dip galvanised for long-lasting corrosion resistance
- » Supplied ready assembled – simple, efficient installation
- » 180° hinge opening for wide, unimpeded access
- » S 5702-2018 'Manufactured in accordance with BS 5702:2018

Specification	Overall width	Internal width	Height to handle	Weight
1745GSC	1950mm	1540mm	1522mm	60kg



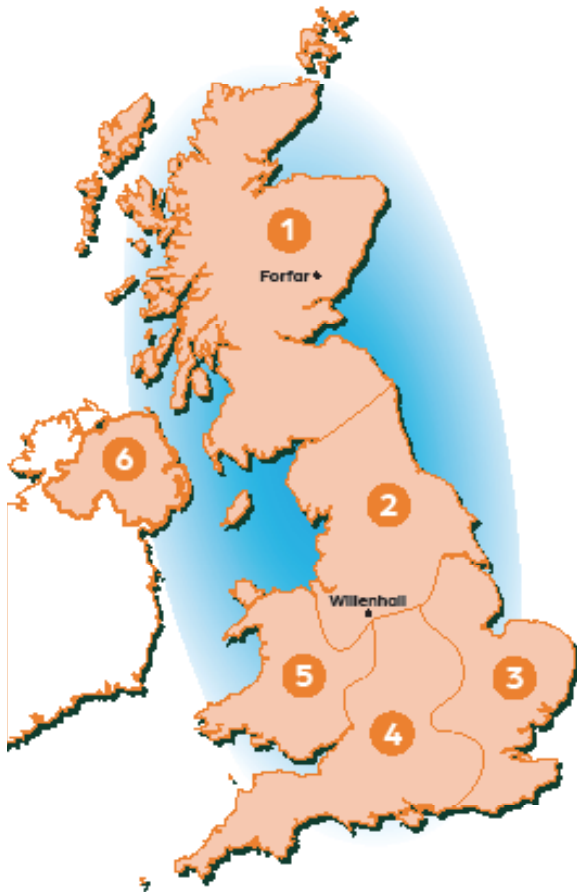

**Director, Export Sales Manager**

Bob Ritchie  
 M: 07885 950574  
 E: rritchie@ritchie-uk.com

**Customer Service Team**

T: 01307 462271  
 E: salesupport@ritchie-uk.com

**1 | Scottish Area Representative**

Chloe Melville  
 T: 07736 885531  
 E: salesscotland@ritchie-uk.com

**2 | Northern England Representative**

Barry Robinson  
 M: 07872 839036  
 E: brobinson@ritchie-uk.com

**3,4 | Southern England Representative**

Julie Russell  
 M: 07889 056560  
 E: jrussell@ritchie-uk.com

**5 | Sales Manager & Welsh Area Representative**

Carwyn Davies  
 M: 07714 159352  
 E: cdavies@ritchie-uk.com

**6 | Northern Ireland Sales**

T: 01307 462271  
 E: sales@ritchie-uk.com



Our policy is one of progressive design. Minor changes may be made to the products shown in our range without the illustrations being altered. All weights and measurements are approximate. The specification will however, remain essentially the same.

Cancellations of orders of products made to customer's own designs or specifications will not be accepted.

Note - Although we make every effort to give advance notice of price increases, equipment will be supplied on the basis of price ruling at the date of despatch.

All products are protected by design rights or patents in terms of the Copyright Designs and Patent Act 1988.

Our development department is available to assist you in the design and production of special equipment for research projects.



# Product Catalogue 2026



Scan QR code to view all products



01207 442271

[salesupport@ritchie-uk.com](mailto:salesupport@ritchie-uk.com) • [www.ritchie-dc.co.uk](http://www.ritchie-dc.co.uk)

